

T130

Utility, Series 6
127 hp



Packed with features to help accomplish your goals

TYM's flagship tractor combines sophisticated design, powerful performance, and premium features for operator convenience.




1. Backlit logo



2. LED Dual side mirrors



3. Push to start button




4. Adjustable suspension seat



5. External hydraulic top link switch



6. Digital instrument panel

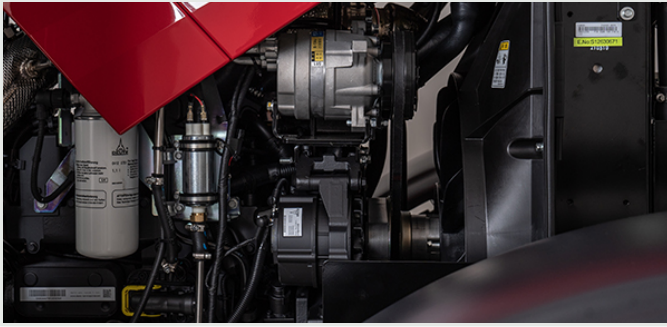

Powered by DEUTZ engine, Delivering exceptional productivity and efficiency

Built with precision German engineering, the turbo charged Deutz TCD3.6L engine offer high power and enhanced torque for maximum work efficiency. Their longer lifespan and high reliability makes them an ideal choice to boost productivity.



Premium Cabin

The comfort of the cabin space is crucial for ensuring operational efficiency. That is why we have applied a simple and easy-to-use control system to the T130 tractor. Additionally, a variety of interior convenience features creates a driver-oriented cabin space.



Interior detailing to promote operator comfort

Operators can activate core functions easily from the main console, including the PTO on/off switch. Digital displays provide alerts and diagnostic information instantly and at a glance. In addition to a spacious and ergonomic seat, the operator platform has a flat floor with a rubber mat to support comfort during entry, exit and while driving.



Smart charger, Heated and Cooled cup holders

The T130 has the most premium features for operator convenience, including a wireless smartphone charger and a keep hot or cold cupholder, within easy reach from the operator seat.



LED worklights for better visibility

Work safely in low-light conditions, with brighter lights and a wider field of illumination.



Electronic hydraulic control system with BOSCH

The German-engineered electronic hydraulic control system, equipped with BOSCH technology, enables safe working conditions and easy control of attachments and hydraulic function. These functions include auto PTO, back-up, 4WD, sensitivity controls and so much more.

Technical specifications

ENGINE	
Engine manufacturer	Deutz TCD3.6L4-CFXT95U
Type	Turbo charger
Gross engine power	127 hp
PTO power	118 hp 87 kW
Rated engine speed	2200 rpm
No. of cylinders	4
Displacement	221 cu. in. 3621.5 cc
Air cleaner	Dual Dry
Alternator	12V, 120A
Fuel system	CRDI
POWERTRAIN	
Transmission type	Power Shuttle / 6-Speed Shift APS
No. of speeds	F36 x R36 w/Creep
Max. traveling speed	23.1 mph 37.2 km/h
Brakes	Wet, Multi-disc
Steering	Hydrostatic
Clutch	Wet, Multi-plate
CAPACITIES	
Fuel tank	50.2 gal 190 L
Coolant	19.1 qt 18.1 L
Crankcase	2.1 gal 8 L
Transmission/Hydraulics system	26.9 gal 101.8 L
Front axle	1.9 gal 7.2 L

PTO	
PTO type	Independent
PTO control	Electro-hydraulic
PTO rear	540/540E/1000 (Reversible shaft)
HYDRAULIC SYSTEM	
Pump type	Dual gear pump
Implement flow	20.1 gpm 76.1 l/min
Steering flow	9.1 gpm 34.5 l/min
Total flow	29.2 gpm 110.5 l/min
Category, 3-point hitch	II
Hitch lift capacity	8262 lb 3747.6 kg
Hitch lift capacity at 24 inches behind link ends	8014 lb 3635.1 kg
Lift control type	Position/Draft
No. of standard remote valves	6
DIMENSIONS & WEIGHTS	
Overall length with 3-point hitch	176.8 in. 4490.7 mm
Overall width	92.9 in. 2359.7 mm
Wheelbase	102 in. 2590.8 mm
Height to top of cabin	115.7 in. 2938.8 mm
Min. ground clearance	16.1 in. 410 mm
Min. turn radius with brakes	166.5 in. 4229.1 mm
Min. turn radius without brakes	189 in. 4800.6 mm
Weight with cab	10020 lb 4545 kg
STANDARD TIRES	
Agricultural - Front	380/85 R 28
Agricultural - Rear	460/85 R 38(18.4R38)

TL130SL Front-End Loader

Attachments

Engineered to lift higher and lift heavier materials, the TYM TL130SL is optimized for superior material handling. Taking advantage of the power and performance of the TYM utility tractors, the TL130SL is compatible with the T130.

Lift height	162 in. / 4114 mm
Lift capacity	5415 lb / 2456 kgf
Self leveling	Available



CAPACITIES & REACH	
Lift height	162 in. 4114 mm
Max. lift height under level bucket	152.5 in. 3873 mm
Clearance with bucket dumped	127 in. 3227 mm
Reach at maximum lift height	14.9 in. 379 mm
Max. dump angle	60°
Reach with bucket on ground	98.9 in. 2513 mm
Max. rollback angle	52°
Digging depth	6.1 in. 155 mm
Lift capacity	5415 lb 2456 kgf
Breakout force at ground level, pivot points	6618 lb 3002 kgf
Bucket rollback force at ground line	6874 lb 3118 kgf
Self leveling	Available
Relief valve setting (Loader control valve)	2987 psi 210 kg/sq. cm

DIMENSIONS & WEIGHTS	
Overall height in carry position	86.4 in. 2194 mm
Depth of Attachment (to the back of the inner shell)	22.8 in. 579 mm
Height of Attachment	22.2 in. 563 mm
Length of Attachment (to pivot point)	34.9 in. 886 mm
Weight of boom & quick attach mechanism (1)	1210 lb 549 kg
Weight of mounting frame (2)	591 lb 268 kg
Weight of bucket (3)	448 lb 203 kg
Loader total weight (1+2+3)	2249 lb 1020 kg
Lift cylinder	3.1x1.8 in. 80x45 m
Bucket cylinder	3.0x1.6 in. 75x40 m
Attachment used for specification	92 in. 2330 mm

CYCLE TIMES	
Boom raising time	4.4 sec
Boom lowering time	2.8 sec
Bucket rollback time	2.6 sec
Bucket dumping time	3.6 sec

Upgrades for the Series 6, T130 NA

Complement the capabilities of your TYM tractor with compatible accessories and options.

Accessories

Front counterweights



Options



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world